

285W MONOCRYSTALLINE GEM SERIES SS285M/60



WE MAKE THINGS WORK THE WAY YOU WISH THEY WOULD.


- Sleek double-black design
- Premium anti-PID cell technology produces a high module efficiency of up to 17.7%
- Waterproof (IP67 rated) German junction box
- Anti-UV backsheet for superior weather resistance and long-term durability
- 4-busbar technology for enhanced cell output
- Anti-reflective tempered glass coating to maximise light penetration
- Tier 1 Quality Certification through SolarIF
- Combined 25-Year Product + Performance Warranty:
 - 25 years product warranty
 - 12 years @ 90% performance warranty
 - 25 years @ 80% performance warranty



www.sapphire-solar.com
info@sapphire-solar.com



285W MONOCRYSTALLINE GEM SERIES SS285M/60

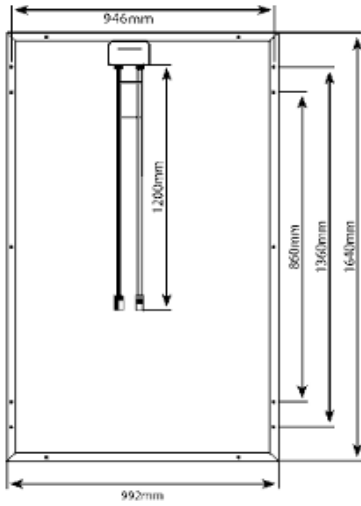

- **A-Grade Components** - careful procurement of trusted and compliant components such as industry-leading solar cells, backsheets and encapsulants to suit high UV conditions.

- **A-Grade Procedures** - daily raw material checks, production inspections and procedure checks to ensure our strict manufacturing parameters are maintained.

- **A-Grade Testing** - stringent testing to ensure that every Sapphire Solar panel satisfies our strict performance and safety criteria

- **A-Grade Warranties** - Combined 25-Year Product and Performance Warranty provides complete peace of mind

SPECIFICATIONS

MECHANICAL CHARACTERISTICS	
Solar Cells	Monocrystalline 156mmx156mm (60 cells)
Dimensions	1640 x 992 x 35mm
Weight	19.0kg
Front Glass	3.2mm tempered, antireflective glass
Frame	Anodized/electrophoreticaluminium alloy
Cables	4.0mm ² , symmetrical lengths 1.2m
Connector	Genuine MC4
Junction Box	IP67 rated fully sealed German

TEMPERATURE CHARACTERISTICS	
Temperature Coefficient Pmax	-0.42%/°C
Temperature Coefficient Voc	-0.32%/°C
Temperature Coefficient Isc	+0.04%/°C
Operating temperature	-40°C -+85°C
NOCT (Nominal Operation Cell Temperature)	45°C +/- 2°C

ELECTRICAL CHARACTERISTICS		
Rated Power at STC (PmPP)	W	285
Positive Power Tolerance	%	0-3
Maximum Power at STC	W	288
Cell Efficiency	%	21.0-21.2
Minimum Module Efficiency (%)	%	17.5-17.7
Maximum Rated Power Voltage (Vmpp)	V	31.85
Maximum Rated Power Current (Impp)	A	8.95
Open Circuit Voltage (Voc)	V	39.18
Short Circuit Current	A	9.46
Maximum System Voltage	V	1000
Maximum Series Fuse Rating	A	15A
Fire Rating		Class A

PACKAGING CONFIGURATION	
Container	40" GP
Pieces per Pallet	28
Pallets per Container	28
Pieces per Container	784

